



Sfx clarke AVL

clarke AVL



SFX and Automatics

ANTARI - HAZE MACHINE hz 500



Antari[®]

SMOKE MACHINE



MOKA SFX

Input voltage	US model : AC 100-120V, 50/60Hz 4.2A EU model : AC 220-240V, 50/60Hz 2A
Rated power	120V 400W. 240V 480W
Fluid consumption	1.1 ml/min
Fluid tank capacity	2.5 Liters (0.66 gallon)
Compatible fluid	Antari HZL Haze Fluid
Operating time	37 hrs at max. output

Ambient temp/ range	0°C – 40°C (32°F – 104°F)
Control	Manual, Timer, DMX
DMX channels	1 channel
Connection	IEC (Power) . XLR 5-pin (DMX)
Dimension	L 490 W 351 H 338 mm. (L 19.29 W 13.82 H 13.31 inch)
Weight	31.5 kg (69.45 lbs)

Spray Height	8-10 meters
Warm-up time	7 mins
Voltage	AC110V -220V, 60Hz /50Hz
Max Power	1500W
Control	Remote / DMX512
LED	27pcs x 3W RGB
Fuel Consumption:	1L/hour

N.W	7KG
G.W	8KG
Product Size	44×32.5×21cm
Packing Size (Carton)	47×37×26 cm
Component	Power Cord, DMX Cord
Packing Option	Normal Carton

clarke
AVL

MOKA MK-E26

MOKA SFX- SPARKULAR JET



MOKA SFX

Power	740W
Voltage	AC 220V 50Hz / 110V 60Hz
Spray Direction	Vertical (Instant spray)
Spray Height	10 meters
Heating Method	Electromagnetic heating (3-5 minutes)
Control Mode	DMX512
DMX Channel	2 CH
Pressure Value	1.5pa / 2.5pa / 4.5pa (three gears)
Waterproof Level	Only the shell is rainproof
Spark Power Capacity	160g
Fittings	3m power cord, 3m signal cable
Product Size	39×35×30cm
Net Weight	22kg
Carton Pack Size/Weight	51×47×41cm / 25kg

clarke
AVL

CO2 Big Streamer



Confetti Machine



Confetti Cannon Big Streamer Cannon Machine
with Flight Case, Celebration Performance Confetti
Launcher Cannon Jet Height 15-25m for Wedding
Event Stage.

CO2 Big Streamer



Confetti Cannon Big Streamer
Cannon Machine with Flight
Case, Celebration Performance
Confetti Launcher Cannon Jet
Height 15-25m for Wedding
Event Stage.

LED CO2 JET



MOKA SFX

LED CO2 GUN



MOKA SFX

Spray Height	10 – 12 Meter
Angle	0-90 degrees adjustable
Voltage	100V – 240 V / AC. 50/60 Hz
Max Power	100W
Control	DMX512
DMX Channel	8
Max Pressure:	1600 Psi
N.W	10KG
G.W	13KG
Product Size:	33 x 33 x 44cm
Packing Size (Carton):	39 x 37 x 49cm
Component	Power Cord, DMX Cord, Gas Cord

Spray Height	6-7 Meter
Angle	Forward Only
Voltage	100V – 240 V / AC. 50/60 Hz
Max Power	20W
Control	Handy carry
DMX Channel	none
Max Pressure:	1600 Psi
N.W	4.8KG
G.W	6.5KG
Product Size:	66 x 24.5 x 35cm
Packing Size (Carton):	76 x 31.5 x 41cm
Component	Power Cord, Gas Cord
Packing Option	Normal Carton / Flycase (Separate Cost)

DUAL PIPE LOW FOG MACHINE



MOKA SFX



HAZE MACHINE 600W



MOKA SFX

Coverage	70m2 / 100s
Heat-up time	4min
Voltage	AC110V -220V , 60Hz /50Hz
Max Power	3000W
Control	DMX512 / Remote control
DMX Channel	2
Fuel Consumption	1L/hour
N.W	54KG
G.W	56.5KG
Product Size:	86x49x63cm
Packing Size	86x49x63cm
Component	Power Cord / DMX Cord
Packing Option	Ready Flycase Pack

Warm-up time	5 Min
Voltage	AC110V -220V , 60Hz /50Hz
Max Power	600W
Control	Remote / DMX512
DMX Channel	-
Fuel Consumption	0.5L/hour
N.W	30KG
G.W	30KG
Product Size:	52x40x45cm
Packing Size (Carton):	52x40x45cm
Component	Power Cord / DMX Cord
Packing Option	Ready Flycase Pack

MOVING HEAD SPARKLAR MACHINE/ UPWARDS



MOKA SFX

DMX CONFETTI BLASTER



MOKA SFX

Spark Height	1-5 Meters
Spark Source	Cold Spark Powder
Angle	Moving head
Voltage	AC110V / 220V, 50Hz / 60Hz
Max Power	750W
Control	DMX 512 / Remote
DMX Channel	5
N.W	11.8KG
G.W	13.0KG
Product Size:	26.5×26.5x48cm
Packing Size (Carton)	
Component	Power Cord, DMX Cord

Spark Height	15 – 18 meters
Set-Up	-
Voltage	Voltage: AC100-220V,50Hz/60hz
Max Power	50W
Control	DMX 512/ Electric control
DMX Channel	1
Confetti Load	20kg
N.W	66KG
G.W	77KG
Product Size:	74 x 38 x 137cm
Packing Size (Carton)	74 x 38 x 137cm
Component	Power Cord, DMX Cord
Packing Option	Ready flycase

**clarke
AVL**

OPTLASER 10W RGB



PANGOLIN FB3



Source Type	Semiconductor diode Full-colour RGB laser projector
Suitability	indoor laser displays [atmospheric abstract, text, animations]
Beam Size@Aperture	3.5*6.5mm
Divergence	1.1mrad
System control	Auto, Sound to light, SD-Card, DMX512 , ILDA
Scanning System	40kpps ILDA@8° , Scan angle Max 60°
Wavelength [nm]	R/638 G/520 B/445
Laser Power [mW]	2600mW / 3750mW / 4500mW
Guaranteed opt. output [mW]	10W
Power Consumption [W]	<150W
Weight [kg]	6.95Kg

Powerful, Affordable, and Easy to Use, QuickShow is the complete package including both the hardware and software.QuickShow comes standard with nearly 2,000 pre-loaded cues, and it allows you to create custom beam effects, graphics, text, animations, abstracts, and more! The QuickShow software is designed to make creating high quality laser shows faster and easier than ever before.

Hardware: The QuickShow package comes with the FB3-QS (FlashBack)
Software: The QuickShow package comes with the latest QucikShow software and all updates are FREE to our users. The software is extremely powerful, yet easy to use. Users can create their own effects, or choose from any of the nearly 2,000 preloads cues. You can also preprogram shows, or play them “live” right at your event. QuickShow users can also upgrade to use the BEYOND software.

□

Amhaze Stadium Haze Machine



Amhaze Stadium is a tour-ready professional water-based haze machine ideal for large-scale applications. With an output of 14,000 cfm, the Amhaze Stadium boasts an impressive 30-second heat-up time. It also features a durable, low-profile road case to survive the rigors of touring and production. The output and speed of haze can be easily adjusted via DMX or the LCD screen, and the unit comes equipped with an M12 threaded insert for hanging.

- Water based Haze Machine
- Warm-up time: 30 seconds
- Reservoir: 1.3 gallons
- Uses 0.447 liters of fluid an hour at maximum output
- Maximum Output: 14,000 CFM
- Heater Wattage: 1400w
- Volume Control: Yes
- Continuous Output: Yes
- 3-pin and 5-pin XLR DMX in/out

COLD SPARKLER FOUNTAIN / DOWNWARDS



MOKA SFX

Spark Height	2-5 Meters
Spark Source	Cold Spark Powder
Angle	Fall down
Voltage	AC110V / 220V, 50Hz / 60Hz
Max Power	400W
Control	DMX 512 / Remote
DMX Channel	2
N.W	6.4KG
G.W	8.0KG
Product Size:	20x20x18cm
Packing Size (Carton):	31x31x31cm
Component	Power Cord, DMX Cord

clarke
AVL

FLAME MACHINE



MOKA SFX

Fire Height	5-6 Meters
Fire Source	Butane fluid x 4
Angle	Up Straight
Voltage	AC110V / 220V, 60Hz / 50Hz
Max Power	180W
Control	DMX 512
DMX Channel	7
N.W	11.6KG
G.W	13.1KG
Product Size:	38x33x31cm
Packing Size (Carton):	45x40x39cm
Component	Power Cord, DMX Cord

BUBBLE MACHINE



Specifications

- 7000 bubbles per minute!
- Highest output bubble machine
- Can fill a space with bubbles in seconds
- 2 bubble-wheels
- 4 fans
- 1.8 litre capacity tank

One of our most impressive professional bubble machines! The extra fans push the bubbles upwards to give the bubbles a real lift and create a gloriously wide dispersion around your venue.

The machine comes with a remote control unit, a 'wired' remote control, features an easy-drain tap to empty the machine and is wheeled for ease of transportation and positioning.

LED CONFETTI BLOWER



Voltage	AC 110V/220V 60/50Hz
Power	1800W
Control Mode	DMX/Remote
LED	12pcs x3W
DMX Channel	6
Capacity	0.3-0.5Kg confetti
Continuous Output	20s-30s
Spray Height	5-6m
Size	57 x 33 x 33cm
Gross Weight	9Kg

LED Pixel Tube



Specifications

- 39.5-inch/ 1000mm TRI LED Color Tube with UV-resistant polycarbonate tubing
- 64 Bright TRI LEDs
- Built-in color macros (When using the LED Pixel 4C or LED Pixel 10C Controllers)
- Long life LEDs (50,000 hr. rating)
- RGB Color Mixing
- Strobe & Pulse LED Effect
- Runs extremely cool! - NO Duty Cycles! - Run all night!
- Visible for 360 degrees
- Can only be used with either LED Pixel 4C or LED Pixel 10C controller
- Power input: DC 24V, 4-pin input power cable with female connector
- Power consumption: 15W per LED tube
- Dimensions (LxWxH): 39.5"x2"x2" / 1000 x 50 x 50mm
- Weight: 2 lbs. / 0.5 kgs

MK-F02 X20 Fog Jet



MOKA SFX

Model Number	MK-F02 X20 Fog Jet		
Voltage	AC 220-240V, 50Hz	Total Power	4000W
Fog Fluid Capacity	5L	Fuel Consumption	3min/1L
Preheating Time	9 minutes	Second Heating Time	30 seconds
Fog Jet Height	12 meters	Smoke Spray Time	1 min 40s
LED Color	RGBA ("A"-Amber)	LED Power	9w each
Control Mode	DMX512 (3-pin/5-pin ports), Remote, Manual		
DMX Channel	9/12/13/16 channels		
Consumables	Quick smoke Oil (CO2 Plume Effect)		
Net Weight	35 kg	Gross Weight	57.5 kg
Product Size	60.3×36.3×49.8 cm	Flight Case Packing Size	68×42.5×66 cm (with wheels)

clarke
AVL

MOKA FX

Moving Head flame PF-1800



MOKA FX

Fire Height	8-10m	Rainproof
Voltage	AC100V – 240V, 50Hz – 60Hz	
Power	400W	
Max Pressure	1300bar	
Control Mode	DMX Control with 210° Flexible Angle	
Fuel Info	Tank Capacity: 10L	Consumption: 60ml/s
Flame Fuel (Not Included)	ISOPROPANOL / ISOPAR G, H, L, M / Diesel (Available, But Smoky, Not Recommended)	
Supply	Power Cord, DMX Cable	Battery + Charge Cord (Optional)
Battery Capacity	8000mA	Using About 8h; Charging About 4h
Weight	Net: 31KG	Gross: 48.7KG (Flight Case)
Product Size	60.5×37.5×37.5cm	
Package Size	68x46x57cm (Flight Case + 13cm Wheels)	69x47x58cm (Flight Case + Carton + 13cm Wheels)

clarke
AVL

Moka FX SF-BF3000

4 Head LED Bubble Fog Machine



MOKA SFX

The SurgeFX SF-BF3000 4 Head LED Bubble Fog Machine is a powerful multi-effect machine designed to deliver mesmerizing bubble and fog effects, enhanced by vibrant LED lighting. Perfect for concerts, festivals, parties, and special events, this machine combines high-output bubbles and dense fog with colorful LED lighting to create a captivating and immersive atmosphere.

4-Head Design for Maximum Output:

With four heads for increased bubble and fog output, the SF-BF3000 ensures that your event space is filled with a continuous stream of bubbles and fog, giving you full coverage for large venues. The combination of effects provides a visually stunning experience, perfect for creating a memorable event.

Key Features:

4-Head Design: Provides maximum bubble and fog output for large-scale events.

Bubble & Fog Effects: Combines high-volume bubbles with thick fog for dynamic, layered effects.

LED Lighting: Customizable LED lighting enhances the visual impact with vibrant colors.

DMX512 & Manual Controls: Offers flexible control options for professional setups or manual operation.

Product Specifications:

Power: 3000W

Effects: Bubbles, fog, LED lighting

Control Modes: DMX512, manual operation

Dimensions: 25.98 x 16.93 x 15.35 inches


Weight: 53

clarke
AVL



Automatics

KINETIC BALLS

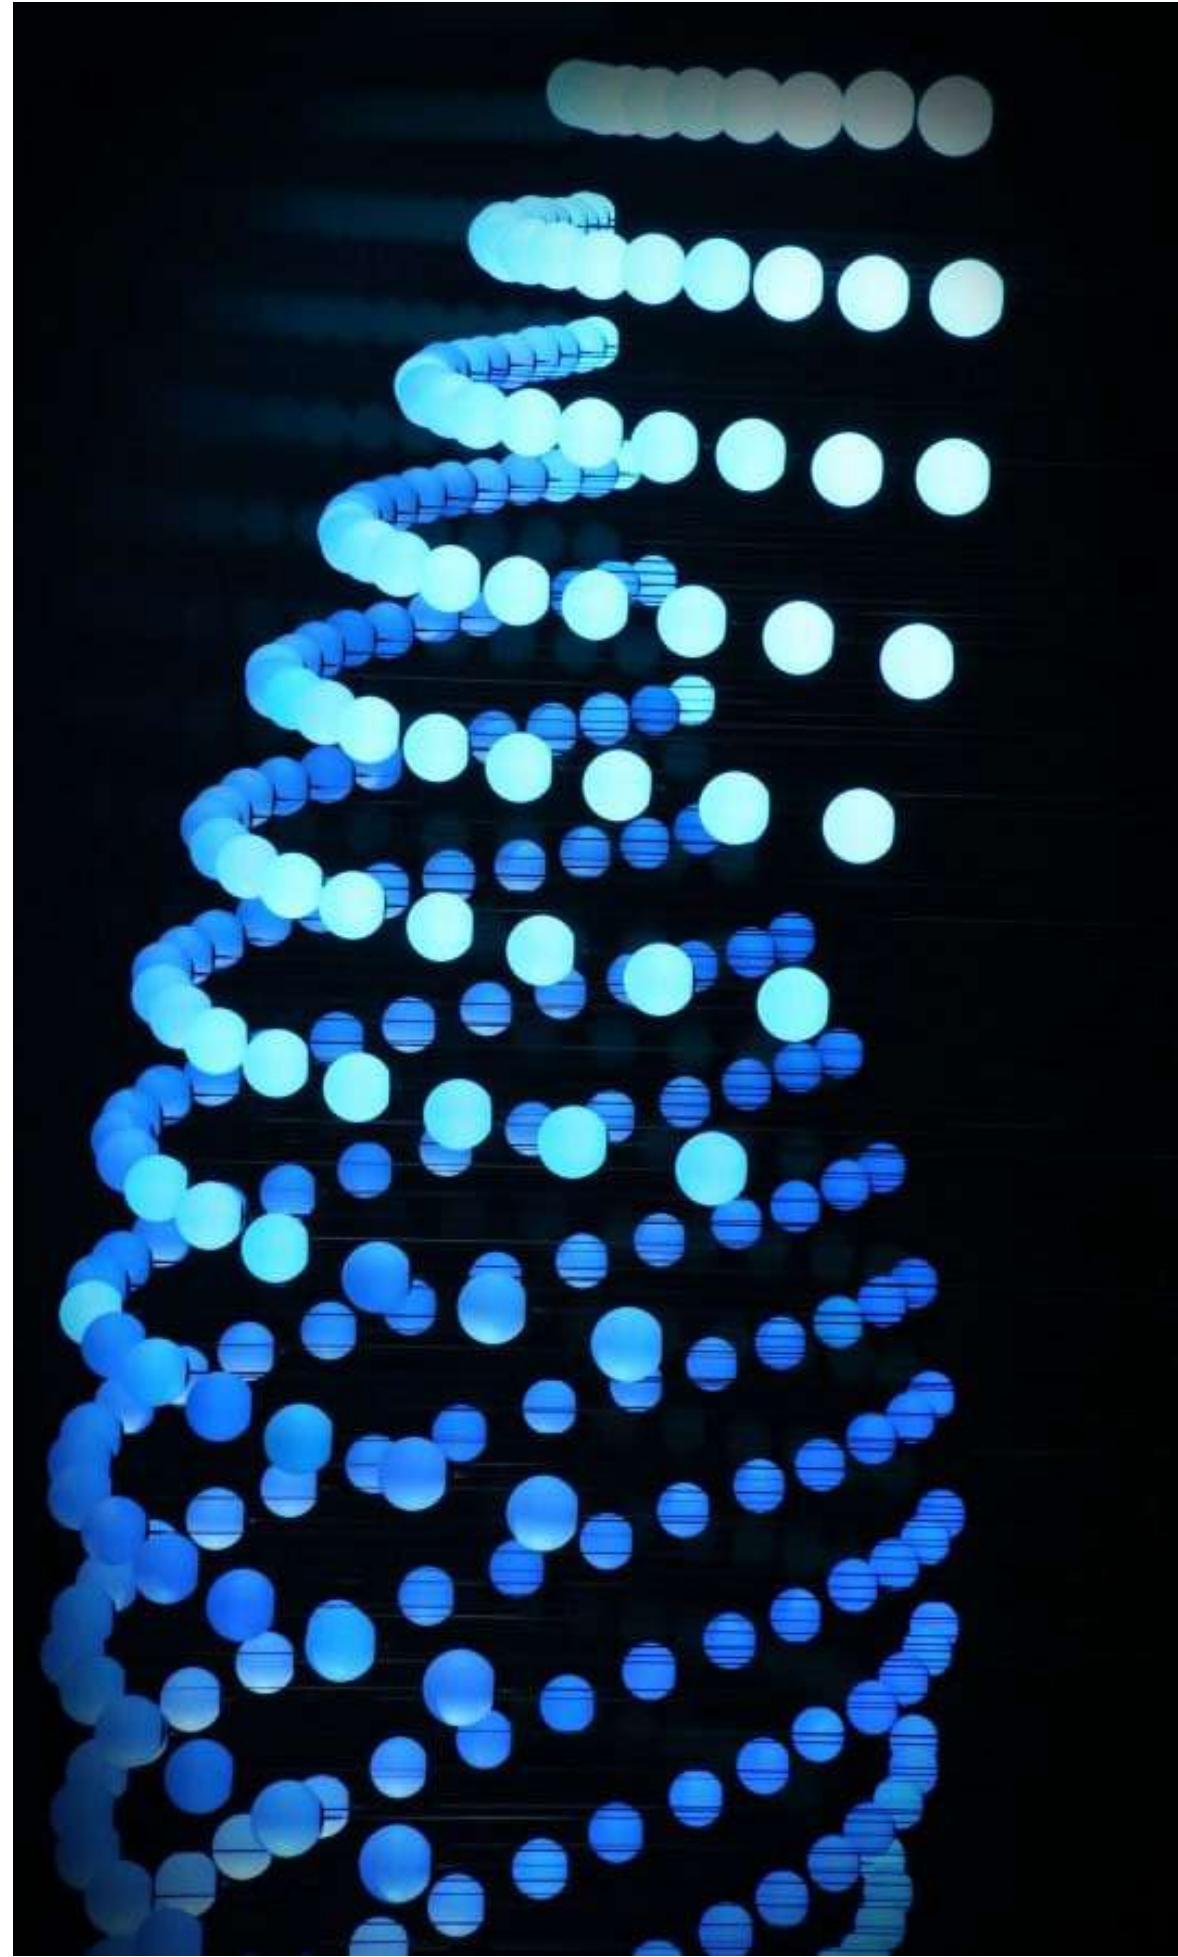

- One winch+ one ball 3
- Control Channel:9CH 4 Control Model:DMX512,Masterslave ;Sound Control
- 6 Light source: RGB SMD LEDS 8
- G.W:7.0kg;
- 3M cable+30CM LED BALL

AUTO REVEAL MACHINE



This reveal system lets you launch in style and at the push of a button. Unveiling curtain disappears like magic. AutoReveal is perfect for product launches, unveiling new cars, or premiering just about anything you can cover with an unveiling curtain.

The 8 x 5 m standard size Satinac reveal curtain unveils fully in 10 seconds. This AutoReveal curtain is custom made and sold separately. Change the reveal curtain as much as you want with the easy hook-and-loop attachment.

Specifications

220V single phase motor with wired remote control

Power supply : 230v • 50Hz • 16A

Motor output : 0.435 Kw

Output speed : 70 RPM

Output torque : 18 Nm

Duty cycle : S2:4min

Kabuki Drop / Power Drop Machine



MOKA SFX

Voltage	1-5 Meters
Power	Cold Spark Powder
Load weight	Moving head
Control	AC110V / 220V, 50Hz / 60Hz
Product weight	750W
Packing size	DMX 512 / Remote

clarke
AVL

Car turntable RP3-5



Technical Parameters Max Load capacity Platform diameter
3000kg 5000mm Self-height Rotation
Speed 250mm 0.2~2rpm (Adjustable) Pit installation Rotation
angle Pit depth 250mm 360° continuous
Rotation direction Structure Clockwise and Anti-clockwise di-
rection Electrophoresis structure
Top surface Platform thickness Power Unit Electrophoresis
Checkered plate 5mm thickness Drive
Mode Motor Power Friction-wheel drive 400w*4pcs Control
System Control mode Frequency
converting control Button control and remote control Power
source 240V, 50HZ, 3Phase Payment
Terms FOB Qingdao USD7670 per unit Including spare parts, 2
remote control, 4motors, 15 support
wheels Payment term Production time 30% T/T before produc-
tion, balance before shipment 25
working days from payment. Package Price validity Plywood
package, 2700*2100*700mm, 1500kg
25 days Warranty 1 year warranty apart from man-made
faults.

Bike turntable 2x3



Technical Parameters Max Load capacity Platform diameter 1000kg
5000mm Self-height Rotation
Speed 250mm 0.2~2rpm (Adjustable) Pit installation Rotation angle Pit
depth 250mm 360° continuous
Rotation direction Structure Clockwise and Anti-clockwise direction
Electrophoresis structure
Top surface Platform thickness Power Unit Electrophoresis Checkered
plate 5mm thickness Drive
Mode Motor Power Friction-wheel drive 400w*4pcs Control System
Control mode Frequency
converting control Button control and remote control Power source
240V, 50HZ, 3Phase Payment
Terms FOB Qingdao USD7670 per unit Including spare parts, 2 remote
control, 4motors, 15 support
wheels Payment term Production time 30% T/T before production, bal-
ance before shipment 25
working days from payment. Package Price validity Plywood pack-
age, 2700*2100*700mm, 1500kg
25 days Warranty 1 year warranty apart from man-made faults.

Scissor lift table SJG1035



Scissorlifttable SJG1035 Basicspecifications Loadcapacity 1200kg Plat-
formsize(W*D) 1200*2400mm Overallsize(W*D) Closedheigh
1280*2400*900mm † Maxplatformheigh 900mm † 3500mm Travelheight
2900mm Structure Scissorstructur 3 layers e Topsurface 4mmthick-
nesssteelcheckerplate Scissorsstructure
High-strength120*60*6mmrectagularsteeltube Painting&Rustremoval All-
powder(RAL7016)coatingandshotblasting Supportpost 4pcssupport-
tokeeptheliftupanddownvertically MaintainBar Preventtheplatformdown-
formaintainwork Guardrail 4sideguardrail,openingateach2000mmside
Powersupply Drivesystem Hydraulic Hydrauliccylinder Highprecision-
wear-resistingΦ70mm*2pcs LiftSpeed Up60s,down54s Explosion-proof-
valves Yes,theplatformcankeepitspositionincasehosebroken Spillover-
valve Yes,adjustthepressure Emergencydropvalve Yes,theiftcanbemanu-
allydownincasepoweroff Pumpstation 5,5kw,insideoroutsideplaced Oil-
tank 30Loilrequired,Anti-wear32#hydraulicoil Controlsystem Powersupply
AC,380V,3phase,50hz Controlvoltage 24Vcontrol Controlpanel Up-
/Down/Stopbutton,5mcontrolwirefromlift Remotecontrol 2pcswirelessre-
moter,Up/Down/Stop Safetytripbar Theliftwillstoponcetheedgetouchan-
yobstaclewhendown Controlboard integratedcircuitplate,lowfailurerate
Limitswitch Price Pricevalidit Withsafetylimitswitch,incasetheupswitchbro-
ken y 20daysfromquotation Warranty 12monthsfrominstallatio

clarke AVL

Thank You



+974 5513 6142, +974 3383 7780



Sport Accelerator Qatar Business District



anoop@clarkeavl.com



www.clarkeavl.com



QATAR | UAE | KSA | POLAND | GERMANY | USA